


ROTOR	CFR	CAPACITIES IN CUBIC FEET PER MINUTE						
		5 RPM	10 RPM	15 RPM	20 RPM	25 RPM	30 RPM	35 RPM
6 VANE	0.386	1.930	3.860	5.790	7.720	9.650	11.580	13.510
8 VANE	0.369	1.845	3.690	5.535	7.380	9.225	11.070	12.915

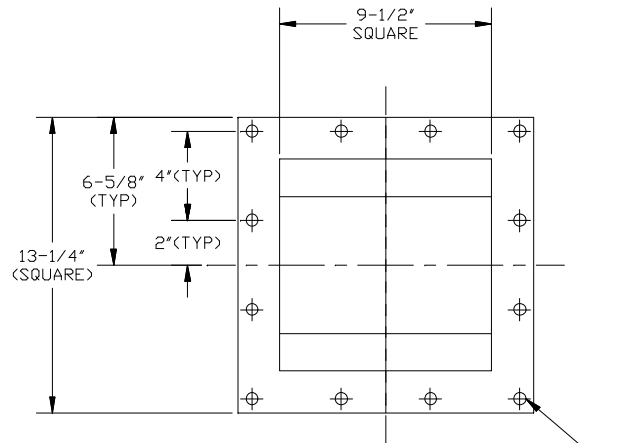


(12) 9/16" DIA HOLES
EQUALLY SPACED AS SHOWN.

DETAIL OF TOP AND BOTTOM FLANGE

MOTOR HP/RPM			
MOTOR HP	FEEDER RPM	A	B
1/3 HP	7, 8, 10	35-7/8"	7.19
1/2 HP	11, 12, 15	35-7/8"	7.19
3/4 HP	17, 19, 22	35-7/8"	7.19
1 HP	27, 30, 32, 36	32-13/16"	7.19

NOTES:

- ALL MOTORS: 3-60-230/460, TEFC, INTEGRAL WITH REDUCER.
- INFORMATION IS BASED UPON CATALOG DATA. THIS INFORMATION MUST BE USED IN CONJUNCTION WITH, AND NOT IN SUBSTITUTION FOR, THE APPLICABLE PRODUCT CATALOG WHICH CONTAINS IMPORTANT PRECAUTIONS AND OTHER PERTINENT INFORMATION.
- DIMENSIONS A & B WILL VARY WITH SPECIAL OPTION MOTOR SUCH AS EXPLOSION PROOF, VARIABLE SPEED AND NEMA "C" FACE.

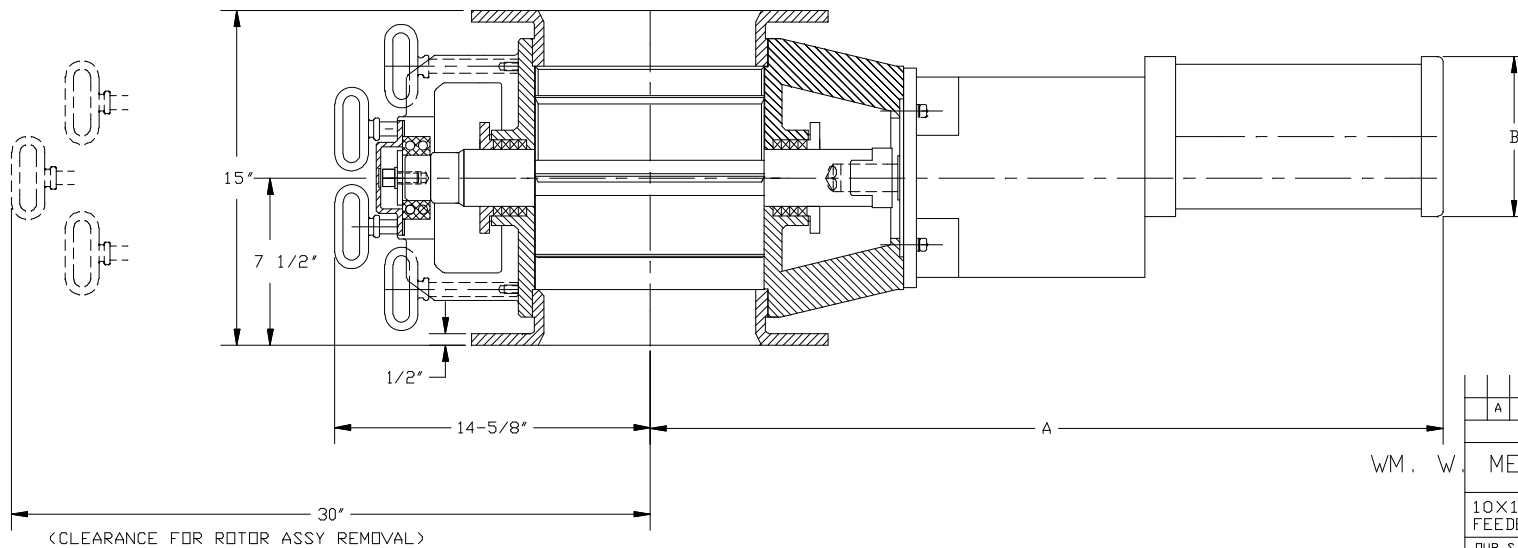

WM. W.

A	GJL	UPDATE MOTOR TABLE & SIDE VIEW	GJL
REVISIONS			
MEYER & SONS, INC.			
SKOKIE, ILLINOIS			
10X10 KWIK KLEAN SQUARE FLANGE FEEDER WITH TYPICAL RECOMMENDED GEARMOTOR			
OUR S.D. NO.		REF. S.D. NO.	
DRAWN	J.M.	DATE	7-17-96
APPROVED	MRD	SCALE	
			DRAWING NUMBER
			430D-1707

MAR10X10KKSFD.R.DWG